




vmraudio®

Pocket Mixer **MX-BOX**



Connection example

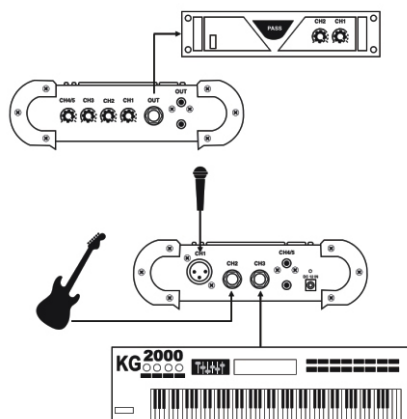

Ensure that plastic bags, packaging, etc. are disposed properly and are not within reach of babies and young children. Check hazard!



For the transport and protective packaging, environmentally friendly materials have been chosen that can be supplied to normal recycling. Ensure that plastic bags, packing etc. are properly disposed. Do not just dispose these materials with your normal household waste. Make sure that they are fed to recycling. Please follow the notes and markings on the package.

Mezclador de 5 canales

Gama de frecuencias: 10 Hz - 95 kHz

Entradas:

- 1x XLR, balanceada, mono
- 2x 1/4», alta ohmica no balanceada, mono

Salidas:

- 2x RCA, no balanceadas, mono
- 1x 1/4», no balanceada

Control de volumen independiente para canales 1,2,3 y par de canales 4/5

Impedancia de entrada: 1MQ

Impedancia de salida: 100Q

Nivel máximo de entrada +15 dBu

THD +N < 0,005

nivel de nariz: -105 dBu

Robusta carcasa de metal con goma pie para. Soporte seguro

Alimentación mediante adaptador adaptador suministrado

Dimensiones (An*Al*L):
150mm*40mm*100mm

Peso: 0,5 kg

Pocket Mixer

MX-BOX